



**PACKAGE
PAVEMENT™**

**JOINT-LOCK™
PAVER FINISHING SAND**

1. Product Name: Joint-Lock Paver Finishing Sand

2. Item Code(s):

- 98557 - 70 LB. TAN (JOINT-LOCK)
- R98473 - 70 LB. CHARCOAL (JOINT-LOCK)

3. Manufacturer:

Package Pavement Co., Inc.
675 Leetown Road, PO Box 408
Stormville, NY 12582
(800) 724-8193
FAX (845) 221-0433
www.packagepavement.com

4. Product Description:

Joint-Lock Sand is a polymer modified paver finishing sand that is specifically designed to complement and enhance any paver installation. Joint-Lock sets hard to resist weed growth, insect mining and erosion. It will resist scouring caused by sweeping, water rinsing and traffic.

Joint-Lock Sand is a uniformly blended mixture of top quality mason-grade sand and a polymeric additive. When activated (by water), the polymer allows the Joint-Lock Sand to firm up in the joints between paving stone pavers. It forms a firm barrier - like a one-piece flexible joint. This barrier cannot disappear into the soil, it cannot be blown away, it stays in place between the blocks or bricks. Joint-Lock will help the pavement installation resist movement and prevent water infiltration into the paver base.

It is sold in 70 Lb. (31.7kg) bags / 42 per pallet by nurseries, landscape yards, mason material yards and home centers.


5. Technical Data:

Complete installation instructions can be found on the Joint-Lock bag. Only use Joint-Lock Sand for joints 1/2" or less. Joint-Lock is not recommended for sloping grades greater than 5%.

6. Installation:

- A.** Prior to application of Joint-Lock Sand, make sure the surface is dry and the paver joints are clean. (CAUTION: Do not apply when stones are damp as sand will bond to the surface of the pavers.)
- B.** Pour Joint-Lock Sand evenly over the area. Sweep the sand repeatedly over the paver stone joints until they are completely filled with sand. Surface vibration using a gas powered plate compactor is recommended to ensure compaction.

FINISH. SET. GO™

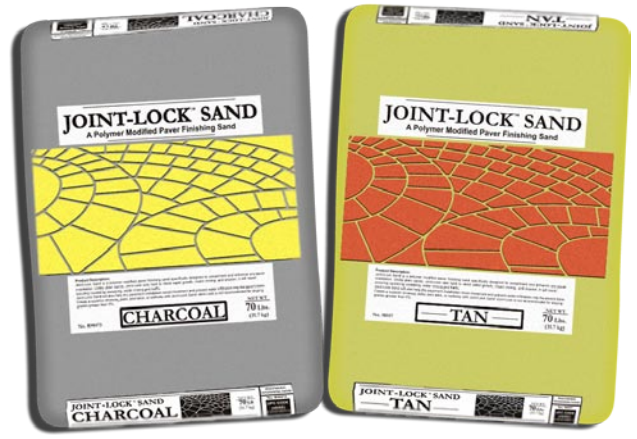

POLYMER PRODUCT SPECS

- C.** Once the joints are filled, remove all excess sand from the surface of the paving stones, especially the tops of the pavers next to the joint lines. Cleaning the surface of the pavers is very important since once the sand is wet it will harden and be difficult to remove.
- D.** Moisten the area with a wide, light spray, allowing water to flood into the paver joints. (Repeat this step 2-3 times at 10 minute intervals)
- E.** Let dry, without traffic, for approximately 18-24 hours. Protect the surface from rain during this time for best results.

7. Caution:

KEEP UNUSED JOINT LOCK SAND DRY! Do not apply if rain is forecast within 3 hours of the application or the temperatures are expected to go below freezing. If treating an existing walkway, patio, or previously laid pavers, make sure the joints are clean and free of debris, preferably to to the base of the paving stone but at least to a depth of 1" below the surface of the pavers.

8. Safety and Handling:

Always wear dust masks, goggles, and gloves while using Joint-Lock Sand. If the product comes in contact with eyes, rinse them thoroughly with water. **KEEP OUT OF REACH OF CHILDREN**

9. Warranty:

Package Pavement warrants this product to be of merchantable quality when used or applied in accordance with the instructions herein. The product is not warranted as suitable for any purpose or use other than the general purpose for which it is intended. Liability under this warranty is LIMITED to the replacement of this product (as purchased) found to be defective or, at the shipping company's option, to a refund of the purchase price. In the event of a claim under this warranty, notice must be given to Package Pavement in writing. This limited warranty is issued and accepted in lieu of all other express warranties and excludes liability for consequential damages.

