



Masonry Cement (Type N)

Product Code: 126170

PRODUCT DESCRIPTION

Basic use: Used for making type N masonry mortar, and for any other application requiring type N masonry cement.

Limitations: Must normally be blended with a specified amount of properly graded sand meeting ASTM C 144.

Composition and Materials: QUIKRETE® Masonry Cement is a high quality Masonry cement meeting ASTM C 91 type N. In many locations the product is also available to meet ASTM C 91 Type S. Consult your supplying plant to confirm compliance with ASTM C 91 type N or S.

Yield: Yield will vary with mix design.

For mortar mixes: Mix 1 part QUIKRETE® Masonry Cement with 2.25 to 3 parts masonry sand for typically used mortars for laying brick and block.

Sizes: QUIKRETE® Masonry Cement is available in 70 lb (31.8 kg) bags.


Color: Gray

TECHNICAL DATA

QUIKRETE® Masonry Cement complies with ASTM C 91 type N or in some locations type S.

INSTALLATION

Before Application: Surfaces to receive masonry mortar should be dry or damp and clean and free of dirt loose debris, grease, oil or any other material which would reduce the bond of the mortar to the masonry.

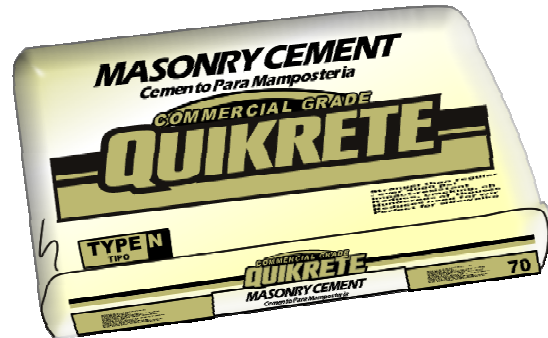

Temperature: Do not use QUIKRETE® Masonry Cement at temperatures below 40EF (4.4EC) or if the temperature is expected to fall below freezing within a 48 hr period.

Manufactured By:



PACKAGE PAVEMENT CO. INC.

P.O. Box 408
Stormville, NY 12582

(800) 724-8193

fax: (845) 221-0433

www.packagepavement.com

The QUIKRETE® Companies, Inc
One Securities Centre
3490 Piedmont Road
Suite 1300
Atlanta, GA 30329

6/30/05